




DN 400 mm ENT.CONT.BETON BORU

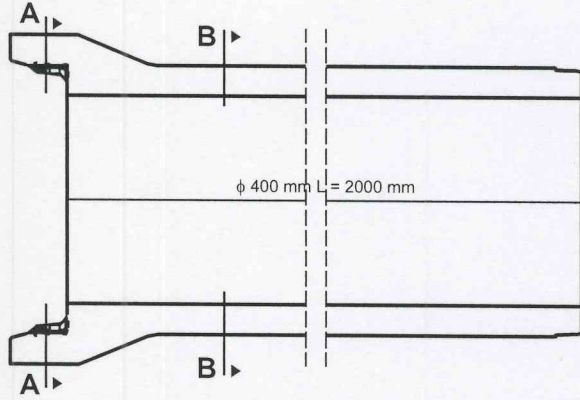

A - A KESİTİ

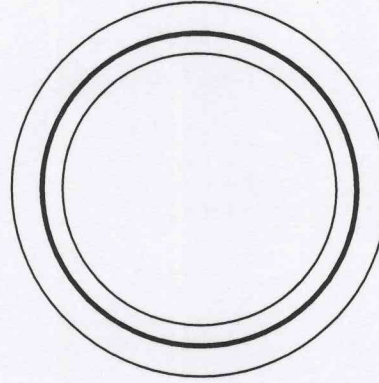

B - B KESİTİ

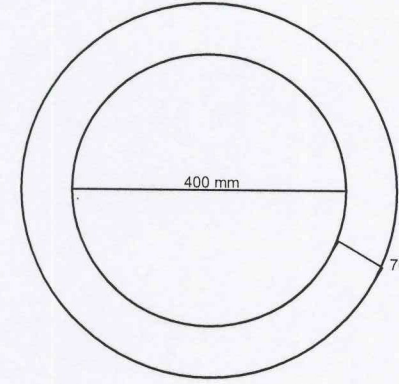

DN 400 mm ENT.CONT.  
BETON BORU HACMİ = 0.2283 m<sup>3</sup>

ÇİMENTO = 114.15 Kg / 0.2283 m<sup>3</sup>

SU = 25.11 Lt / 0.2283 m<sup>3</sup>

TAŞTOZU ( 0 - 4 mm ) = 247.93 Kg / 0.2283 m<sup>3</sup>

MICIR I ( 4 - 12 mm ) = 125.11 Kg / 0.2283 m<sup>3</sup>

MICIR II ( 12- 22 mm ) = 63.92 Kg / 0.2283 m<sup>3</sup>

ENTEĞRE CONTA  
ET KALINLIĞI : 14 mm  
YÜKSEK SIZDIRMAZLIK KUVVETİNE SAHİP


ÜRETİM STANDARDI : TS 821 EN 1916

BETON SINIFI : C 30


ENT.CONTA STANDARDI : TS EN 681-1

BÜTÜN ÖLÇÜLER mm ' DİR.

DN 400 mm ENT.CONT.BETON BORU BOY KESİTİ

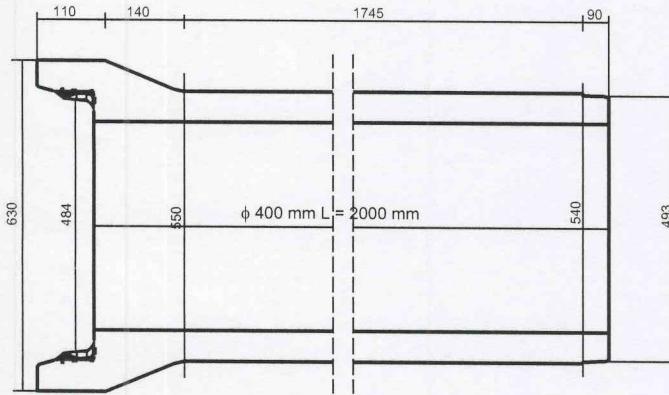

DN 400 mm MUF İMALAT DETAYI

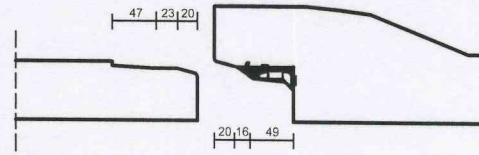

A DETAYI

SARIKAYALAR BETON BORU  
VE İNŞ. TİC. LTD. ŞTİ.

REVİZYON

a)  
b)

DN 400 mm ENT.CONT.BETON BORU  
PLAN - KESİT VE DETAYLAR I

| TARİH     | ÖLÇEK   | PAFTA NO |
|-----------|---------|----------|
| 11 / 2007 |         | EBB.04   |
| YAPAN     | KONTROL | ONAY     |