




DN 500 mm ENT.CONT.BETON BORU

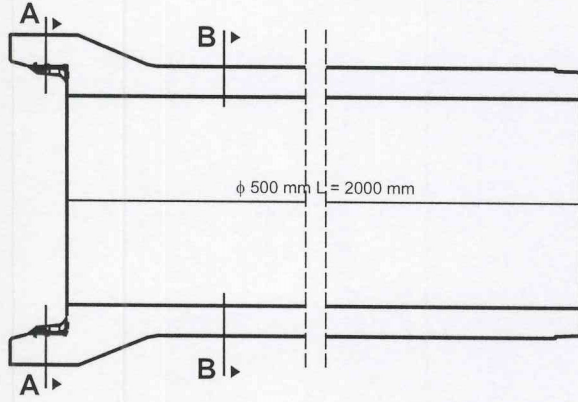

A - A KESİTİ

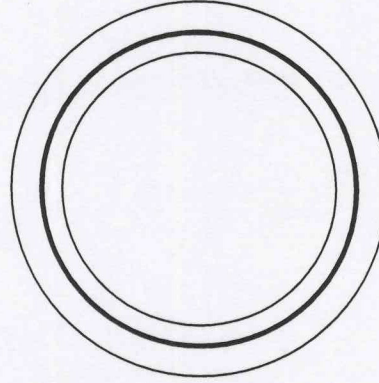

B - B KESİTİ

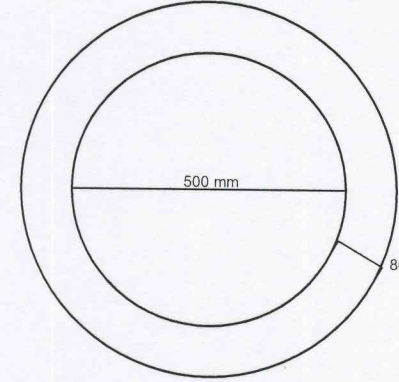

DN 500 mm ENT.CONT.
BETON BORU HACMI = 0.3623 m³

ÇİMENTO = 181.15 Kg / 0.3623 m³

SU = 47.10 Lt / 0.3623 m³

TAŞTOZU (0 - 4 mm) = 384.04 Kg / 0.3623 m³

MICIR I (4 - 12 mm) = 184.77 Kg / 0.3623 m³

MICIR II (12- 22 mm) = 105.07 Kg / 0.3623 m³

ENTEĞRE CONTA
ET KALINLIĞI : 14 mm
YÜKSEK SIZDIRMAZLIK KUVVETİNE SAHİP


ÜRETİM STANDARTI : TS 821 EN 1916

BETON SINIFI : C 30



ENT.CONTA STANDARTI : TS EN 681-1

BÜTÜN ÖLÇÜLER mm ' DIR.

DN 500 mm ENT.CONT.BETON BORU BOY KESİTİ

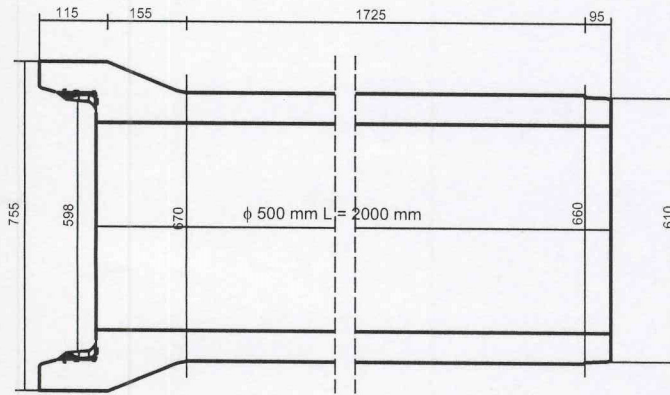

DN 500 mm MUF İMALAT DETAYI

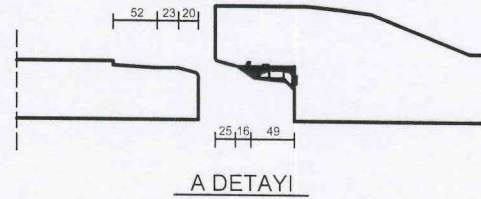

SARIKAYALAR BETON BORU
VE İNŞ. TİC. LTD. ŞTİ.

REVİZYON

a)
b)

DN 500 mm ENT.CONT.BETON BORU
PLAN - KESİT VE DETAYLAR I

TARİH	ÖLÇEK	PAFTA NO
YAPAN	KONTROL	ONAY